


Grade S Shackle Bow Type

- Conforms to AS 2741. Hot Dipped Gal body surface finished and powder-coated Pin.
- Proof tested to 2 times WLL, batch sampling minimum break test to 6 times WLL.
- Marking with WLL, size, manufacture ID, grade and batch number.
- Suitable for lifting applications.
- Test Certificates are available upon request.

• Grade S Shackle Bow Screw Type

• Grade S Shackle Bow Safety Type

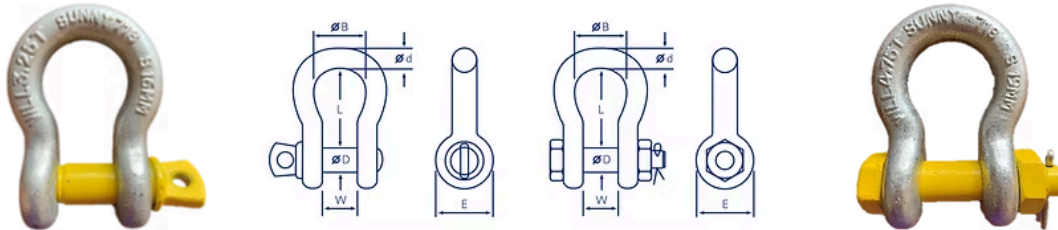

DISCRIPTION

Bow Screw Code	Bow Safety Code	W.L.L (T)	Dimension in mm					Bow screw Weight(KG)	Bow Safety Weight(KG)
			d	D	W	L	E		
SK0306	N/A	0.5	6	8	12	29	17	0.06	N/A
SK0308	N/A	0.75	8	10	13	31	21	0.11	N/A
SK0310	N/A	1	10	11	17	37	25	0.15	N/A
SK0311	N/A	1.5	11	13	18	43	27	0.21	N/A
SK0313	SK0413	2	13	16	21	48	33	0.37	0.44
SK0316	SK0416	3.2	16	19	27	61	40	0.65	0.79
SK0319	SK0419	4.7	19	22	32	72	48	1.06	1.18
SK0322	SK0422	6.5	22	25	37	84	54	1.56	1.88
SK0325	SK0425	8.5	25	29	43	95	60	2.32	2.78
SK0329	SK0429	9.5	29	32	46	108	67	3.3	3.87
SK0332	SK0432	12	32	35	52	119	76	4.51	5.26
SK0335	SK0435	13.5	35	38	57	133	84	5.93	6.94
SK0338	SK0438	17	38	41	60	146	92	7.89	8.79
SK0344	SK0444	25	44	51	73	178	110	13.4	14.99
SK0351	SK0451	35	51	57	83	197	127	18.85	20.65
SK0363	SK0463	55	63	70	105	267	152	38.5	41.05