



PRODUCT DATA

Universal Nylon Wall Plug


A universal nylon wall plug that is light duty and easy to install. Can be used with coach and self-tapping screws with different head configurations. The plug and screw can be installed through the fixture for ease of installation.

Applications	Trades	Substrates
<ul style="list-style-type: none"> • Electrical fittings • Pipe saddles • Lighting fixtures • Signage • Brackets • Handrails • Through fixing of timber frames 	<ul style="list-style-type: none"> • Plumbers • Electricians • Builders • Mechanical services 	<ul style="list-style-type: none"> • Concrete • Stone • Brick


Material	 NYLN Nylon
-----------------	--

Features


- Anti-rotation bars that prevent spinning in the hole.
- Countersunk sleeve end for a flush finish.

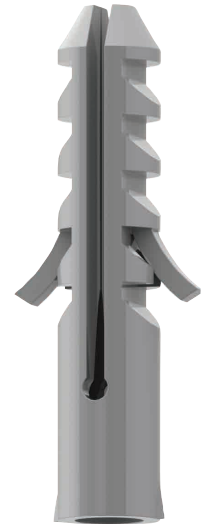

Part	QFIND	Size	Length	Min Hole Depth	Screw Gauge	Drilled Hole diameter	Pack Qty
			L (mm)	(mm)		(mm)	
MWPNUG05	MWP122	5	25	30	4-6G	5	1000
MWPNUG06	MWP123	6	30	40	8-9G	6	1000
MWPNUG07	MWP124	7	35	40	10-12G	7	500
MWPNUG08	MWP125	8	40	50	14-16G	8	500
MWPNUG10	MWP126	10	50	60	16-18G	10	500
MWPNUG12	MWP127	12	60	75	20-24G	12	500

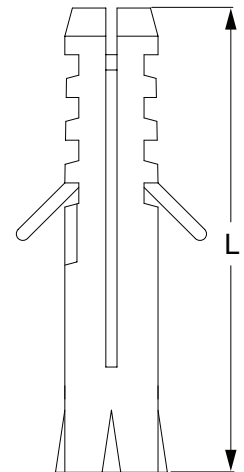

Installation

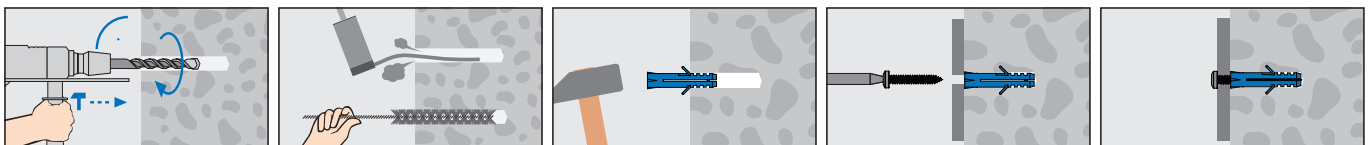

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**