


Synthetic Round Sling

- Conforms to AS4497, colour coded to specific Working Load Limit.
- Made from 100% high tenacity polyester yarn. Safety Factor 7:1.
- Each sling is proof tested and comes with a test certificate.

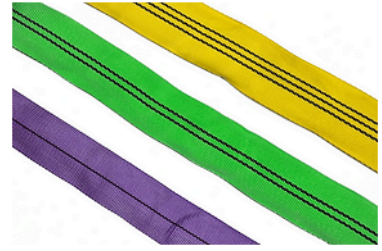

W.L.L (T)	Diameter (mm)	Code/Effective Length(Meter)											
		0.5	1	1.5	2	2.5	3	3.5	4	5	6	8	10
1T	19	RS0105	RS0110	RS0115	RS0120		RS0130		RS0140	RS0150	RS0160		
2T	25	RS0205	RS0210	RS0215	RS0220	RS0225	RS0230	RS0235	RS0240	RS0250	RS0260		
3T	28		RS0310	RS0315	RS0320	RS0325	RS0330		RS0340	RS0350	RS0360		
4T	32		RS0410	RS0415	RS0420		RS0430		RS0440	RS0450	RS0460	RS0480	
5T	36		RS0510		RS0520		RS0530		RS0540	RS0550	RS0560		
6T	38		RS0610		RS0620		RS0630		RS0640	RS0650	RS0660		
8T	43		RS0810		RS0820		RS0830		RS0840	RS0850	RS0860	RS0880	
10T	48		RS1010		RS1020		RS1030		RS1040	RS1050	RS1060	RS1080	
15T	60		RS1510		RS1520		RS1530		RS1540	RS1550	RS1560	RS1580	
20T	70						RS2030		RS2040	RS2050	RS2060	RS2080	RS2100
30T	86						RS3030		RS3040	RS3050	RS3060	RS3080	
50T	119						RS5030		RS5040	RS5050	RS5060	RS5080	