



Civil & Tunnelling Industrial Supplies

1 Contact. 1001 Solutions.

MATERIAL HANDLING HOSE – SWAGED ENDS

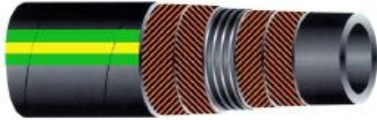
Heavy duty mining hose, suction and delivery, superior resistance to abrasive slurries.

Tube: black conductive NR.

Reinforcement: high tensile textile cord and steel wire helix.

Cover: black conductive SBR/NR blend, abrasion and ozone resistant.

Temperature range: -30°C to +70°C.




	PART No.	I.D. INCH	I.D. MM	O.D. MM	W.P. PSI	WEIGHT KG/MTR
	PMHH76	3	76	102	150	4.80
	PMHH102	4	102	128	150	6.30
	PMHH127	5	127	159	150	9.50
	PMHH152	6	152	184	150	11.50
	PMHH203	8	203	235	150	16.00
	PMHH254	10	254	286	150	22.00
	PMHH300	12	305	344	150	35.20



Civil & Tunnelling Industrial Supplies

1 Contact. 1001 Solutions.

CTIS can offer this hose fitted or unfitted. For the best fitting retention under pressure or suction, we recommend swaged ends, which can include any of the following:

<p>FIXED FLANGE:</p> <p>Table 'D', 'E', ANSI150</p> <p>Custom flange drillings available upon request.</p>		<p>BSP MALE THREAD:</p> <p>For use with threaded camlocks, Powafit claw couplings, Bauers and ground joints.</p>	
<p>SWIVEL FLANGE:</p> <p>Table 'D', 'E', ANSI150</p> <p>Custom flange drillings available upon request.</p>		<p>NPT MALE THREAD:</p> <p>For use with threaded hammer unions, camlocks, claw couplings and ground joints.</p>	
<p>VICTAULIC SHOULDERED ENDS:</p> <p>For use with shouldered pipe fittings and clamps. Roll grooved ends available upon request.</p>		<p>Other swaged ends available upon request.</p>	

